

ACCESS PANEL IN SHEET STEEL

System B1 - With four-square lock



optional

The sheet metal access panel consists of a solid frame and a door made of galvanized steel or stainless steel sheet with integrated four-square lock.

The standard color is RAL 9010 white with a powder-coated finish. Other RAL colors or raw sheet metal are available upon request.

The system features a frame with beveled profiles for a more precise fit on plaster or drywall surfaces. The four wall anchors are adjustable, allowing safe installation on both walls and ceilings.

The door can be either removable or tiltable, with the opening possible to both the right and the left.

NEW

This access panel is also available in an “airtight and dust-proof” version and in stainless steel.



Double door



Stainless steel




CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

The access panels are also available in various versions, such as galvanized, in different colors, or with perforations.

Please do not hesitate to contact us for further information!

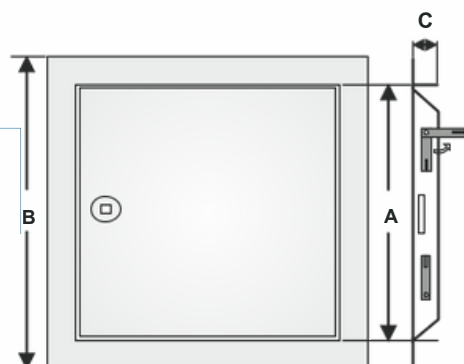

A = Wall hole (Light hole: A - 5 mm)
B = Measure A + 35 mm
C = 25 mm

POSSIBILITIES OF APPLICATION

Sheet metal access panel can be installed on both plasterboard and brick walls or ceilings.

DIMENSIONS

The sheet metal access panel with a four-square lock is available in the following standard sizes.

Dimension A is as follows:

- 200x200 mm
- 300x300 mm
- 400x400 mm
- 500x500 mm
- 600x600 mm

(in this case it is the measure of the wall hole)

NEW

Now available also “airtight and dust-proof” version

tested according to DIN EN 12207
up to 600 x 600 mm



PARTICULAR ADVANTAGES

- Economical solution
- Fast delivery
- Quick and easy installation
- Solid aluminium frame
- Technically proven solution
- Oversized production

For wall



watch installation video

For ceiling



watch installation video

Airtight and dust-proof
for wall



watch installation video

Airtight and dust-proof
for ceiling



watch installation video