






ACCESS PANEL "AIRTIGHT AND DUST-PROOF"


System F2 AKL- Aluminium frame, with plasterboard inlay, for ceilings and drywall partitions

The access panel is made of aluminum profiles with a 12.5 mm, 15 mm, or 25 mm water-repellent impregnated plasterboard panel and two or more snap closures. The two frames of the access panels are made of four profiles securely welded together using a special procedure. Starting from the size of 300 x 300 mm, the access panel is supplied with one or more safety cables with a carabiner to be re-attached after each opening of the hatch to prevent accidents. The installation of our access panel on walls or ceilings (non-walkable) is immediate and very simple. Between the frame and the hatch door, there is a gap of 2.75 mm, equipped with a special gasket certified as "air and dust-tight." The invisible snap closures open the access panel with a simple press. No filling is required. **The door, unless otherwise specified, has no screws and is ready to be painted.**

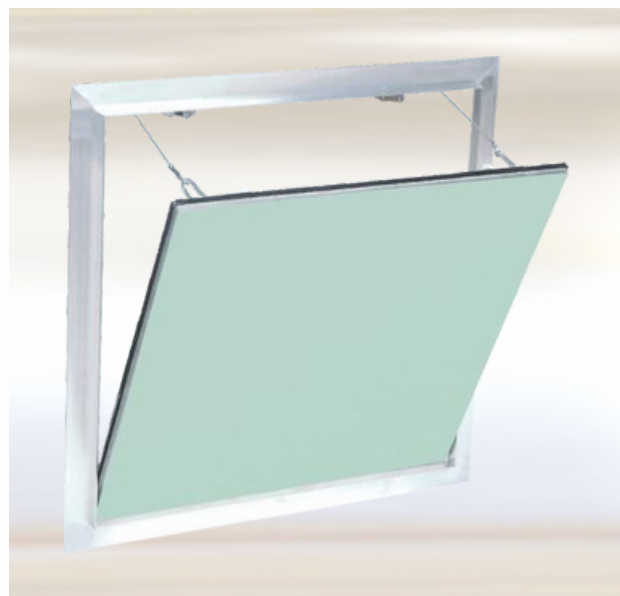

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

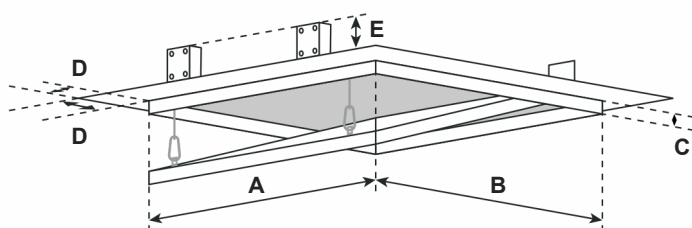

A and B = inside frame measurement
C = frame thickness
D = 24/28 mm
E = 40 mm

PARTICULAR ADVANTAGES

- Quick delivery
- Production of special measures
- Also tested with locks
- Sophisticated solution
- Flush installation in ceilings and drywall partitions
- Validated "airtight and dust-proof"

Tested up to 1000 x 1000 mm.

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar