

ACCESS PANEL REMOVABLE

System F2 AK - Aluminium frame, with or without plasterboard inlay, for ceilings and drywall partitions





The access panel is made of aluminum profiles with a 12.5 mm, 15 mm, or 25 mm water-repellent impregnated plasterboard sheet and features two or more snap closures. The two frames of the inspection hatch consist of four profiles securely welded together using a special process.

From the size 300 x 300 mm onwards, the access panel is supplied with one or more safety cables with carabiners to be reattached after each opening of the panel, preventing accidents.


The installation of our inspection hatches on walls or ceilings (non-walkable) is quick and simple. A 1.75 mm gap remains between the frame and the panel, equipped with a profiled gasket that prevents light gaps between the frame and panel. The snap closures, which are invisible, open the inspection hatch with a simple press. No filling or plastering is required.

The panel, unless otherwise specified, has no screws and is ready to be painted.

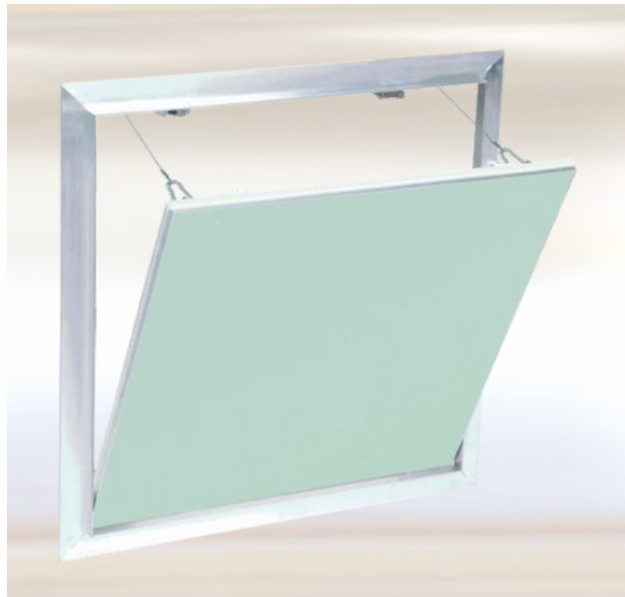

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry

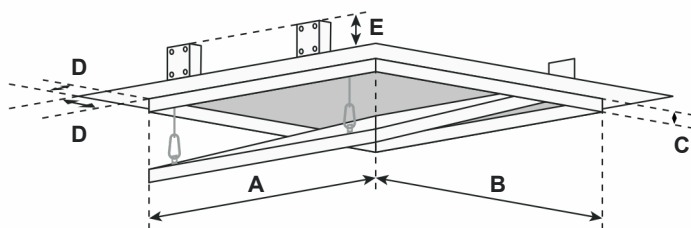

A and B = inside frame measurement
C = frame thickness
D = 24/28 mm
E = 40 mm

PARTICULAR ADVANTAGES

- Measures ready for delivery
- Production of special measures in a short time
- Solid aluminum frame
- Sophisticated solution
- Flush installation in ceiling and drywall partitions
- Flush-to-wall installation
- Removable door ready to be painted
- For vasistas wall application

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar
- SD** Screwdriver operated cam latch
- H** Hex head cam latch
- P** Pinned hex head cam latch

for drywall partitions



watch
installation
video

for ceilings



watch
installation
video