

ACCESS PANEL WITH FISSURED BOARD

System F2 FE - Aluminium frame with fissured plasterboard



The access panel is made of aluminum frame with a 12.5 mm fissured gypsum board panel and two or more snap locks.




The two frames of the access panel consist of four profiles solidly welded together using a special process.

Starting from the 300 x 300 mm size, the access panel is equipped with one or more safety cables with carabiners, which must be reattached after each opening of the door to prevent accidents.

A 1.75 mm gap with a white gasket is left between the frame and the door.

The invisible snap locks allow the access panel to open with a simple push.

The dimensions of the fissures will be made according to the customer's drawing.

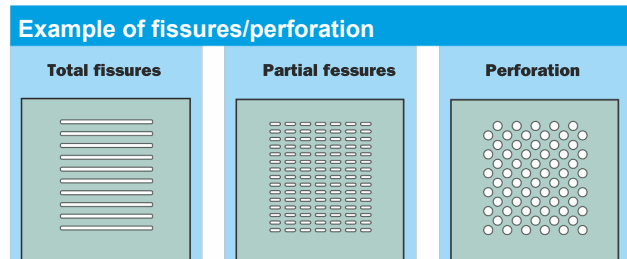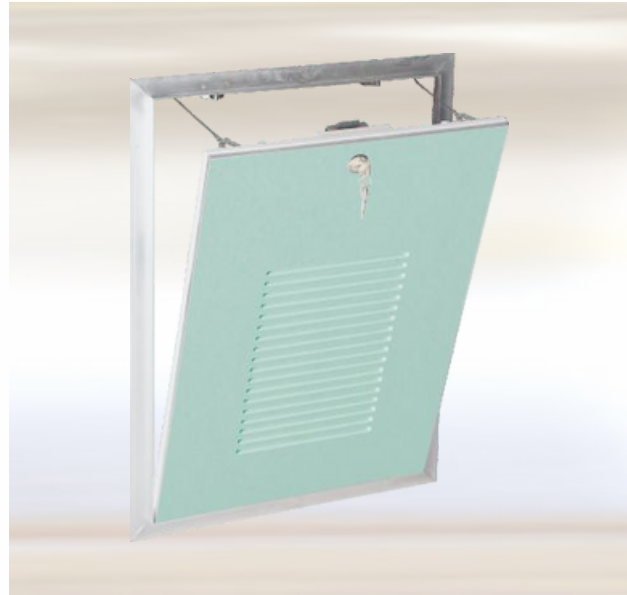

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

PARTICULAR ADVANTAGES

- Fast delivery
- Production of special measures
- Solid aluminium frame
- Sophisticated solution
- Flush installation in ceilings and drywall partitions
- Fits exactly with the existing perforation pattern
- Ready for installation

Locks

- | | |
|-----------|---|
| FS | Four-square lock with white collar |
| Z | Round-cylinder lock with key |
| PZ | Profile cylinder lock with metal collar |
| SD | Screwdriver operated cam latch |
| H | Hex head cam latch |
| P | Pinned hex head cam latch |