

ACOUSTIC LINE ACCESS PANEL

System F3 AA - For walls






Tested in accordance with EN ISO 10140-2:2010
(Measurement of airborne sound insulation)

The access panel is made of aluminum frame with a double high-strength panel, 2 × 12.5 mm thick. On the back side, a special acoustic structure is installed, which can be easily removed.

The access panel is supplied with one or more safety cables with a carabiner, which must be reattached after each door opening to prevent accidents. Installation is possible both on walls and ceilings (non-walkable).

A 2.5 mm gap remains between the frame and the door panel, fitted with a double airtight and dustproof seal that ensures both sound insulation and a hermetic closure of the hatch. The invisible snap locks allow the access panel to open with a simple press.

Wall application only.

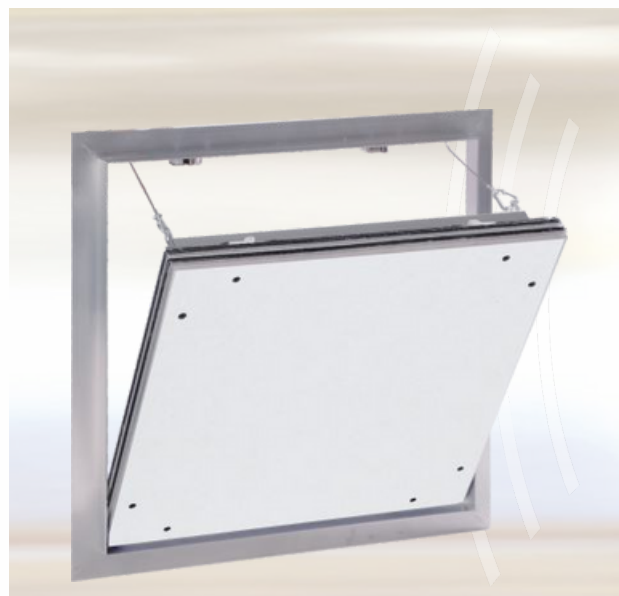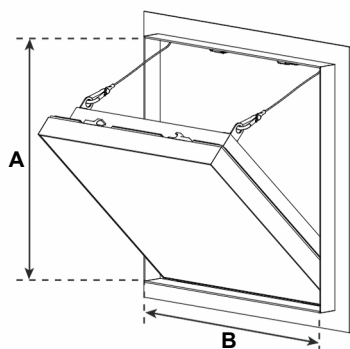

OUR ACOUSTIC LINE FAA MEETS SOUND INSULATION REQUIREMENTS OF UP TO 42 DB

Tested by bti puchenau according to
EN ISO 10140-2:2010 and IFT-ROSENHEIM
according to DIN EN 12207

Flush installation, both on plasterboard walls and ceilings where acoustic insulation is required according to EN ISO 10140-2:2010.

Airtight and dustproof test according to DIN EN 12207.

In walls with sound insulation requirements.

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

PARTICULAR ADVANTAGES

- Quick delivery
- Production of special measures
- Sophisticated solution
- Quick wall installation
- Removable door
- High sound insulation

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar