

FIRE-RATED ACCESS PANEL

System F6 - For ceiling | EI60



The access panel is made of aluminum frame with Fireboard 30 mm gypsum board.

The two frames of the access panel consist of four profiles solidly welded together using a special process.

The access panel is supplied with two or more safety chains with carabiners, which must be reattached after each opening to prevent accidents.

A 2,5 mm joint provided with a profiled fire (expansion) gasket is left between the frame and the door.

The concealed snap locks open the access panel when pressure is applied to the flap on the spring loaded latch side.




Removable hatch



CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

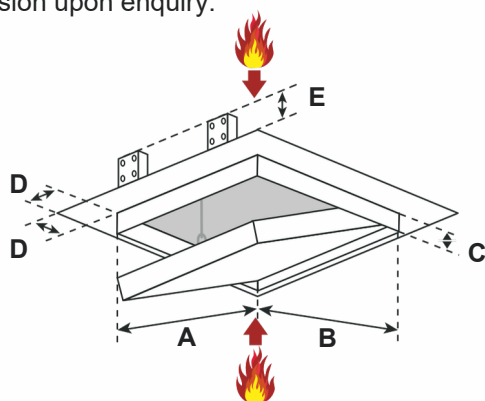

POSSIBILITY OF APPLICATION

On ceilings with EI60 membrane fire resistance. Tested in accordance with the European Norms EN1364-2.

DIMENSIONS

The access panel is tested to size 800x800 mm with certificate BILATERAL.

PARTICULAR ADVANTAGES

- Fast delivery
- Quick and easy installation
- Sophisticated solution
- Quick installation on ceiling
- Bilateral membrane test

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar



watch
installation
video