

FIRE-RATED ACCESS PANEL

System F6 - For ceiling | EI90



55

SYSTEM F6




The access panel is made of aluminum frame with a 40 mm, 43 mm, or 45 mm GKF gypsum board. Each of the two frames of the access panel consists of four profiles solidly welded together using a special process.

Thanks to the addition of an external gypsum board frame and a movable top cover, the required protection is achieved.


The access panel is supplied with two or more safety chains with carabiners, which must be reattached after each opening to prevent accidents.

A 1.75 mm gap is left between the frame and the door, fitted with an intumescent fireproof gasket.

The invisible snap locks allow the access panel to open with a simple push.



Removable hatch

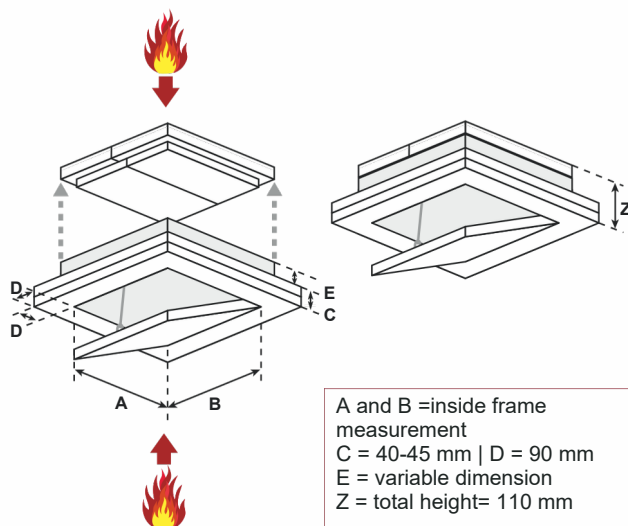

A and B = inside frame measurement
C = 40-45 mm | D = 90 mm
E = variable dimension
Z = total height = 110 mm

POSSIBILITY OF APPLICATION

On ceiling with fire protection:

- EI 90 with thick of 40 mm
- EI 90 with thick of 43 mm
- EI 90 with thick of 45 mm

Tested in accordance with the European Norms EN1634-2.

DIMENSIONS

The access panel is tested to size 800x800 mm with certificate BILATERAL.

Dimension D remains constant.

Dimension E varies according to GKF thickness

Dimension C corresponds to the respective cladding thicknesses.

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar

PARTICULAR ADVANTAGES

- Fast delivery
- Quick and easy installation
- Sophisticated solution
- Quick installation on ceiling



watch
installation
video