

ACCESS PANEL FOR BRICK WALLS

System MWT - Access panel for brick walls






The access panel is made of aluminum frame with a water-repellent coated gypsum board.

The inner frame thickness is 12.5 mm, 15 mm, or 25 mm.

The outer frame is a tubular profile on which special hinges are mounted, allowing an opening of up to 90° or 175°.

From the measure 300x300 the access panel is supplied with two or more safety chains with carabiners, which must be reattached after each opening to ensure safety.

A 1.75 mm gap is left between the frame and the door, fitted with a white decorative gasket.

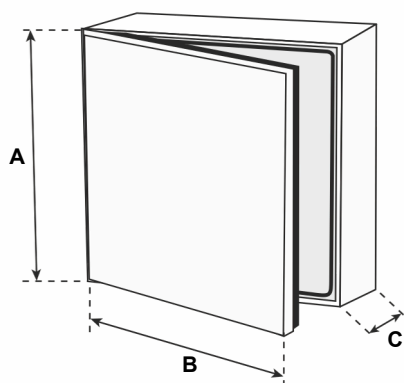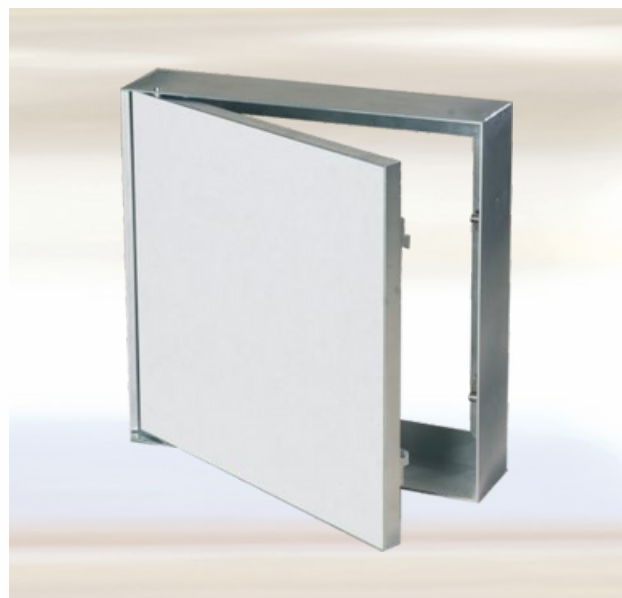

CUSTOMIZED SOLUTIONS

Customized sizes can be produced in every dimension upon enquiry.

A and B = inside frame measurement
C = 90 mm

Light hole: door measure - 56 mm
Wall hole: door measure + 5 mm

PARTICULAR ADVANTAGES

- Fast delivery
- Solid aluminium frame
- Technically proven solution and innovative design
- Quick installation

Locks

- FS** Four-square lock with white collar
- Z** Round-cylinder lock with key
- PZ** Profile cylinder lock with metal collar