

FLOOR ACCESS COVER IN ALUMINIUM

Series 5000 fire-rated EI120 - filling, removable



35

SERIES 500 BS EI120





The Series 5000 floor access cover is made of aluminum. The depth of the tub is 37 mm and the installation height is only 50 mm.

The floor access cover is equipped with three special gaskets along the entire perimeter. The frame is fixed by throwing at floor level.

The tub can then be filled and inserted into the frame. The lid is fixed to the frame by 4 tightening screws, and can be removed with special lifting keys. Filling the tub is possible with tiles, concrete, resin, granite, self-locking, wood, hard floors or other materials.

FIRE PROTECTION

Fire protection tested for up to 120 minutes.

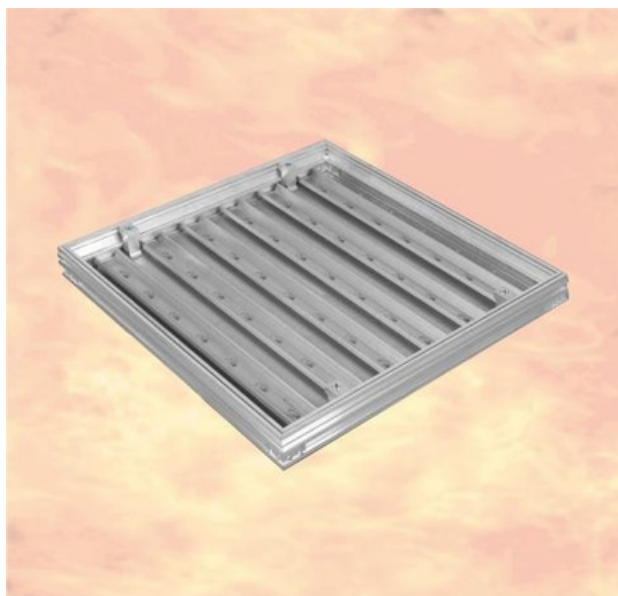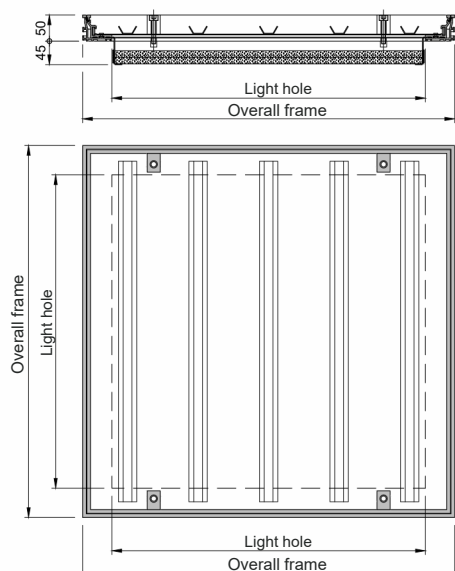

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
PRE-BS-300300AL50	412 x 412	300 x 300	8 kg	S
PRE-BS-400400AL50	512 x 512	400 x 400	12 kg	S
PRE-BS-500500AL50	612 x 612	500 x 500	16 kg	S
PRE-BS-600600AL50	712 x 712	600 x 600	21 kg	S
PRE-BS-700700AL50	812 x 812	700 x 700	28 kg	S
PRE-BS-800800AL50	912 x 912	800 x 800	34 kg	S

M Available in stock while supplies last

S Customized production

APPLICATION

For indoor and outdoor floor ducts.

High quality is required.

MATERIAL

Frame and tray in aluminium.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

LOAD



PARTICULAR ADVANTAGES

- With 25 mm thick fire protection plate
- With 3 special gaskets
- Almost invisible in the installed state
- Can be easily opened due to the conic construction method
- Production in short time
- Own production



↑ EASYLIFTER

We recommend to use the EasyLifter. More informations: page 62