


FLOOR ACCESS COVER IN ALUMINIUM

Series 7500 fire-rated EI120 - filling, removable




The Floor Access Cover Series 7500 is made of aluminum. The depth of the tray is 62 mm and the installation height is only 75 mm. The floor access cover is equipped with three special gaskets along the entire perimeter. The frame is fixed by throwing at floor level.

The tray can then be filled and inserted into the frame. The lid is fixed to the frame by 4 tightening screws, and can be removed with special lifting keys. The filling of the tray is possible with tiles, concrete, resin, granite, interlocking blocks, wood and other materials.

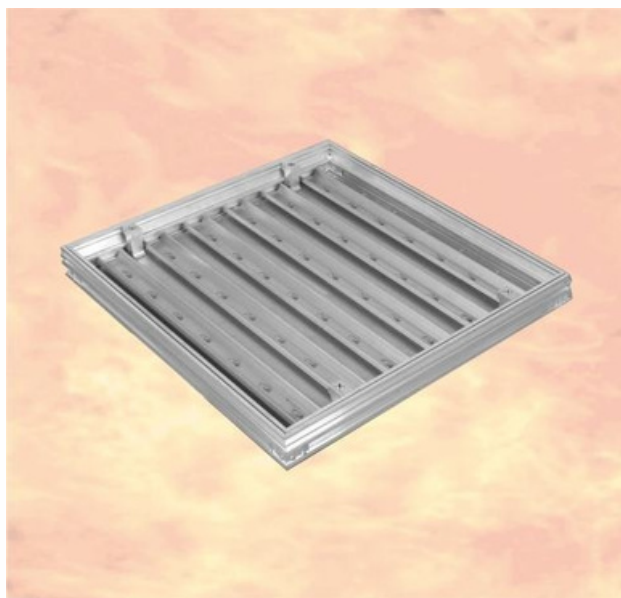

FIRE PROTECTION

The floor access cover 7500 series offers fire protection for up to 120 minutes.

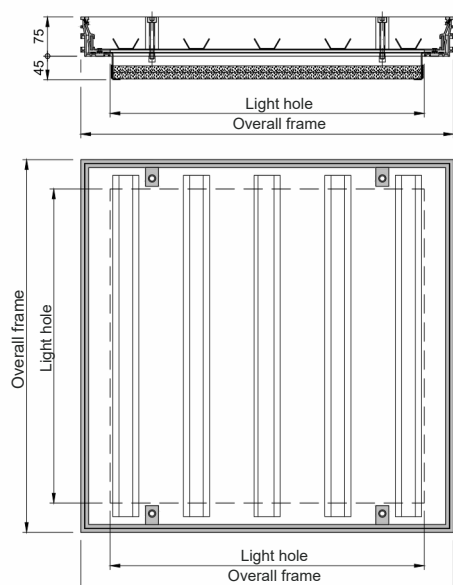

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
PRE-BS-300300AL75	412 x 412	300 x 300	10 kg	S
PRE-BS-400400AL75	512 x 512	400 x 400	15 kg	S
PRE-BS-500500AL75	612 x 612	500 x 500	19 kg	S
PRE-BS-600600AL75	712 x 712	600 x 600	26 kg	S
PRE-BS-700700AL75	812 x 812	700 x 700	31 kg	S
PRE-BS-800800AL75	912 x 912	800 x 800	40 kg	S
PRE-BS-900900AL75	1012 x 1012	900 x 900	43 kg	S
PRE-BS-10001000AL75	1112 x 1112	1000 x 1000	55 kg	S

M Available in stock while supplies last

S Customized production

APPLICATION

For indoor and outdoor floor ducts.
High quality is required.

MATERIAL

Frame and tray in aluminium.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

LOAD



PARTICULAR ADVANTAGES

- With 25 mm thick fire protection plate
- With 3 special gaskets
- Almost invisible when installed
- Can be easily opened thanks to the conical construction design
- Short lead time production
- Own production



EASYLIFTER

We recommend to use the EasyLifter. More informations: page 62