

FLOOR ACCESS COVER IN STAINLESS STEEL

System ECO - fillable, removable



The floor access cover system PRO is made of 2 mm stainless steel. The tray has a depth of 50 mm. The frame is fixed by throwing to floor level. Next the tub can be filled and inserted into the frame. The lid is not fixed to the counterframe but the screws they are only used to allow lifting with a special key.

The tray can be filled with paving, tiles, concrete, artificial resin, granite, terrazzo tiles, wood and hard floor covering or other materials.




APPLICATION

For indoor and outdoor floor ducts.

MATERIAL

Frame and tray made of 2 mm stainless steel.

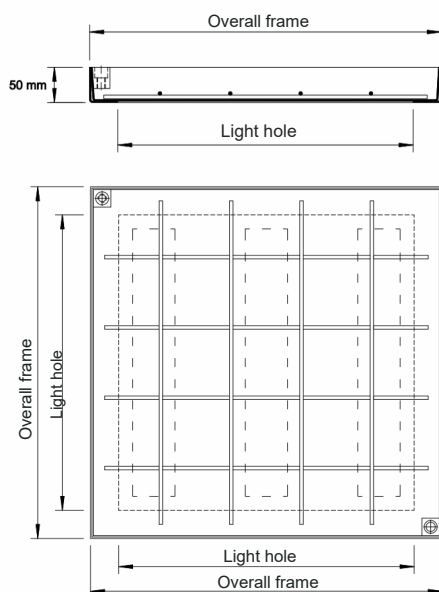

Item	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
ECO-400400E50	400 x 400	320 x 320	7 kg	S
ECO-500500E50	500 x 500	420 x 420	9 kg	S
ECO-600600E50	600 x 600	520 x 520	12 kg	S
ECO-700700E50	700 x 700	620 x 620	14 kg	S
ECO-800800E50	800 x 800	720 x 720	18 kg	S
ECO-900900E50	900 x 900	820 x 820	24 kg	S
ECO-10001000E50	1000 x 1000	920 x 920	28 kg	S

M Available in stock while supplies last

S Customized production

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

PARTICULAR ADVANTAGES

- With fixing anchr for safe support
- Almost invisible in the installed state
- Tray depths of 50 mm available
- Can be easily opened due to the conic construction method
- To be laid at floor level
- Customized production

LOAD



EASYLIFTER

We recommend to use the EasyLifter. More informations: page 62