

FLOOR ACCESS COVER IN ALUMINIUM

Series HSE 75 - filling with power-assisted opening

MCOS



The Floor Access Cover HSE 75 Series is made of aluminum. The depth of the tray is 62 mm and the installation height is 78 mm. The floor access cover is equipped with three special gaskets along the entire perimeter. The frame is fixed by throwing at floor level.

The tray can then be filled and inserted into the frame and the pistons can then also be mounted. The opening is supported by two gas pistons allowing it to be opened and closed by a single person. Safety is ensured by a fall arrest device. The filling of the tray is possible with stone flooring, tiles, concrete, resin, granite, wood and hard floors or other materials.

APPLICATION

For indoor and outdoor floor ducts.
High quality is required.




ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M-S
PRE-600600ALHSE	712 x 725	600 x 600	23 kg	S
PRE-700700ALHSE	812 x 825	700 x 700	29 kg	S
PRE-800800ALHSE	912 x 925	800 x 800	35 kg	S
PRE-900900ALHSE	1012 x 1025	900 x 900	42 kg	S
PRE-10001000ALHSE	1112 x 1125	1000 x 1000	49 kg	S

M Available in stock while supplies last

S Customized production

APPLICATION FIELDS

For Floor Access covers that are opened frequently without having to make any special effort. Indicated for the maintenance of technical rooms such as those for swimming pools. The opening and closing of the compartment takes place without particular effort.

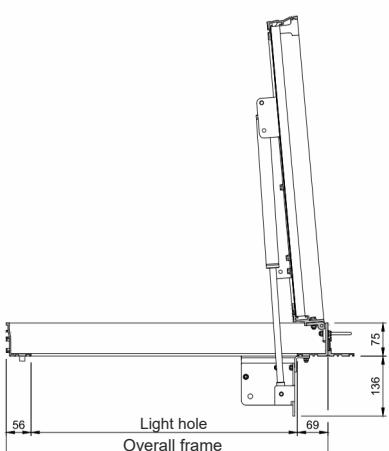

PARTICULAR ADVANTAGES

- With 3 special gaskets
- Almost invisible when installed
- Opening and closing power-assisted
- Short lead time production
- Own production

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions.

A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

LOAD

