



FLOOR ACCESS COVER IN STAINLESS STEEL

System MA-GBZ - filling, with power-assisted opening and central closure

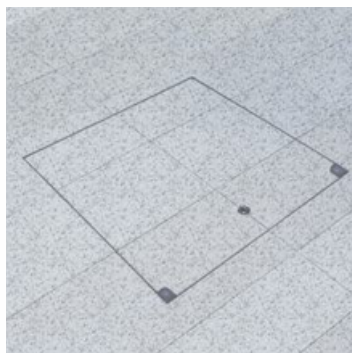

The floor access cover system MA-GBZ is made of 2.5 mm stainless steel. The tray depth is 50 mm and the structural height amounts to 75 mm only.

The frame is equipped with a circumferential, frost- and weather-resistant special sealing joint, which is largely odor- and water-tight. The frame is set in concrete on grade. Subsequently, the tray can be filled and inserted into the frame. The opening process is supported by the high-quality gas pressure springs in a way that the manhole cover can be opened and closed by one single person. The access cover can be opened from the outside and the inside. The tray can be filled with paving, tiles, concrete, artificial resin, granite, terrazzo tiles, wood and hard floor covering or other materials.

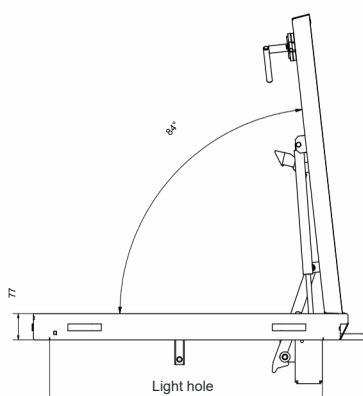

Option: with MA-GBZH system with opening handle on enquiry



ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
MA-GBZ-600600E75	701 x 726	600 x 600	39 kg	S
MA-GBZ-800800E75	901 x 926	800 x 800	45 kg	S
MA-GBZ-10001000E75	1101 x 1126	1000 x 1000	65 kg	S

 Available in stock while supplies last

 Customized production

APPLICATION

For indoor and outdoor floor ducts

APPLICATION FIELDS

For Floor Access covers that are opened frequently without having to make any special effort. Indicated for the maintenance and inspection of technical rooms such as those for swimming pools. The opening and closing of the compartment takes place without particular effort.

The floor access cover can also be opened from inside the technical compartment!

MATERIAL

Frame and tray made of 2 mm stainless steel.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions.

A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

LOAD



 Watch installation video

PARTICULAR ADVANTAGES

- With frost- and weather-resistant special sealing joints
- With fixing anchors for safe support
- Once installed it is almost invisible
- Tray depth amount to 50 mm
- With additional reinforcement cross-braces
- Power-assisted and fall-preventing opening
- Quality own production