

FLOOR ACCESS COVER IN STAINLESS STEEL

System MA-GTR - with tread plate and power-assisted opening



The floor access cover system MA-GTR is manufactured with a frame made of 2,5 mm stainless steel and equipped with a circumferential, frost and weather-resistant special 2 sealing joint, which is largely odor- and water-tight. The frame is set in concrete on grade.


The stainless steel tread plate is fixed on 2 corner points. The opening process is supported by the high quality gas pressure springs in a way that the manhole cover can be opened and closed by one single person. A safety stay prevents uncontrolled closing. The installation height amounts to 77 mm only.

APPLICATION

For indoor and outdoor floor dust.

APPLICATION FIELDS

Manhole cover that are opened frequently for regular inspections and maintenance.

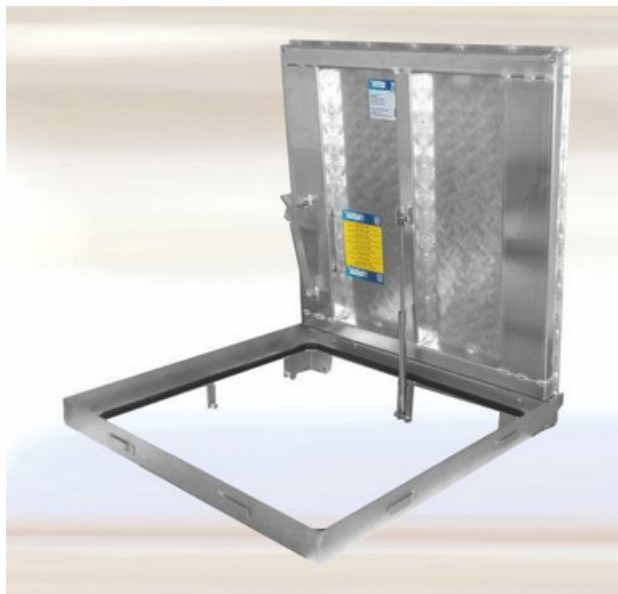

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
MA-GTR-600600E75	701 x 726	600 x 600	49 kg	S
MA-GTR-800800E75	901 x 926	800 x 800	61 kg	S
MA-GTR-10001000E75	1101 x 1126	1000 x 1000	82 kg	S

 Available in stock while supplies last

 Customized production

MATERIAL


Frame made of 2 mm galvanized steel. Door made of 3 mm tread sheet.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.
Also supplied with aluminum plate as MA-GRI system.

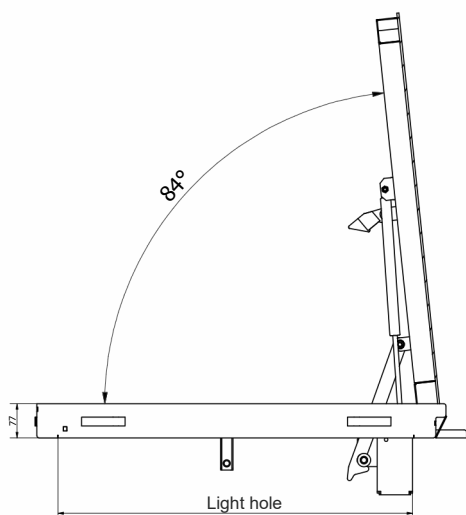

PARTICULAR ADVANTAGES

- With tread stainless steel or aluminum sheet metal
- With frost- and weather-proof seal
- With fixing anchors for safe support
- With power-assisted opening and fall prevention system

LOAD

