

FLOOR ACCESS COVER IN STAINLESS STEEL

System MA-WB - filling, with power-assisted opening, walkable and weatherproof



The floor access cover System MA-WB is made with a 5 mm thick stainless steel frame. The frame is equipped with a particular gasket resistant to frost and atmospheric agents, to protect against infiltrations and the escape of odors. The frame is fixed by casting at floor level.

The stainless steel tank is fixed by means of a screw closure with a brass protection cap. The opening is supported by two quality gas pistons: that allow the opening and closing of the cover by one person. Safety is guaranteed by an anti-fall protection device. The installation height is 260 mm.

APPLICATION

For both indoor and outdoor floor ducts, where the highest quality is particularly appreciated. For covers that are opened frequently and without any particular effort. Especially for inspections such as regular maintenance.


The floor access cover can also be opened from inside the technical compartment!

MATERIALS

Frame made of 5 mm stainless steel and tray made of 6 mm stainless steel


GASKET

With gasket applied to the underside of the lid (which acts as a barrier against insects, against interperies, interchangeable).

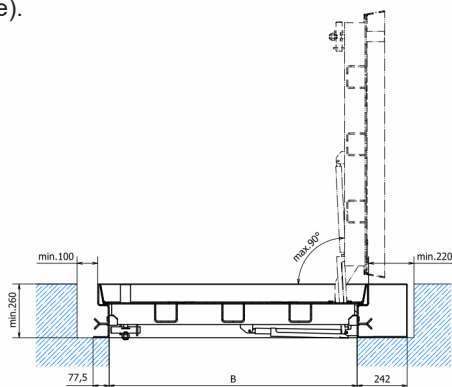

PARTICULAR ADVANTAGES

- With frost- and weather-resistant special sealing joints
- With fixing brackets for safe support
- With additional reinforcement crossbars
- Power-assisted opening
- Quality own production
- With lifting loops for easy transport
- Rustproof

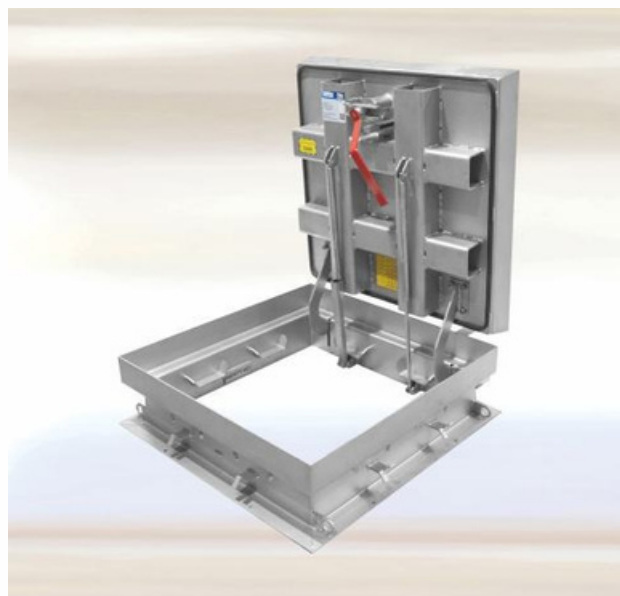

LOAD UP TO D400!

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M-S
MA-WB-800800E2-D	950 x 950	800 x 800	162 kg	S
MA-WB-10001000E2-D	1150 x 1150	1000 x 1000	230 kg	S
MA-WB-12001200E2-D	1350 x 1350	1200 x 1200	295 kg	S

M Available in stock while supplies last

S Customized production

CLOSURE

The lid has a screw closure with a brass protective cap.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions.

A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

OPTIONS:

- **Brass insert:** cylinder insertion by customer
- **Cylinder lock:** with safety cylinder (cylinder length 41.5 mm). For insertion into the brass insert according to LKA guidelines
- **Thermal:** variant with thermal insulation

NOTE

Drive-over access covers are only suitable for installation in restricted traffic areas at reduced speeds.

LOAD

