

FLOOR ACCESS COVER IN STAINLESS STEEL

System MA-WT- with tread plate, power-assisted opening, walkable, weatherproof



The floor access cover System MA-WT is made with a 5 mm thick stainless steel frame.

The frame is equipped with a particular gasket resistant to frost and atmospheric agents, to protect against infiltrations and the escape of odors. The frame is fixed by casting at floor level.

The fixing of the stainless steel tread plate is done by means of a screw closure with a brass protection cap. The opening is supported by two quality gas pistons that allow the opening and closing of the cover by one person. Safety is guaranteed by an anti-fall protection device. The installation height is 220 mm.

APPLICATION FIELDS

Manhole cover that are opened frequently for regular inspections and maintenance.

The manhole cover can also be opened from the internal compartment!

MATERIAL

Frame made of 5 mm stainless steel. Door made of 6/7.5 mm tread sheet.

GASKET

Equipped with a replaceable perimeter seal that acts as a barrier against insects, against interperies.

CLOSURE

The lid has a screw closure with brass protective cap.


CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.



PARTICULAR ADVANTAGES

- With tread stainless steel sheet
- With frost- and weather-proof seal
- With fixing anchors for safe support
- Power-assisted opening
- With additional reinforcement crossbars
- Own quality production
- With lifting loop for easy transport
- Rustproof

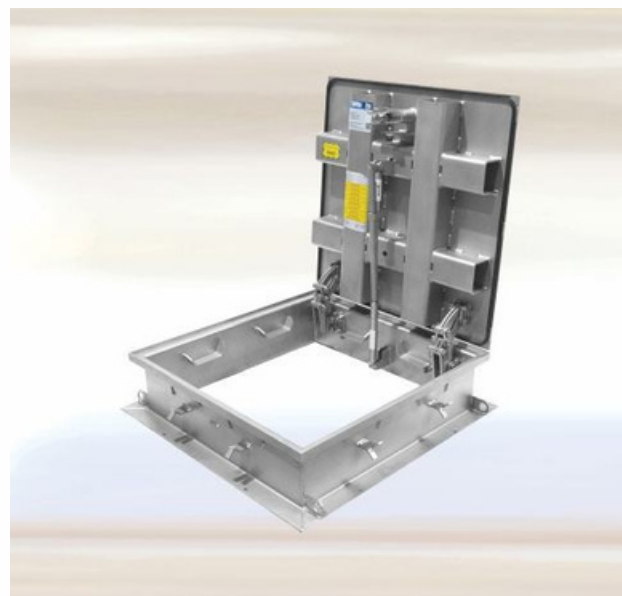

LOAD UP TO D400!

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
MA-WT-600600E2-D	750 x 750	600 x 600	94 kg	S
MA-WT-800800E2-D	950 x 950	800 x 800	138 kg	S
MA-WT-10001000E2-D	1150 x 1150	1000 x 1000	200 kg	S
MA-WT-12001200E2-D	1350 x 1350	1200 x 1200	253 kg	S

M Available in stock while supplies last

S Customized production

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

OPTIONS:

- **Brass insert:** cylinder insertion by customer
- **Cylinder lock:** with safety cylinder (cylinder length 41.5 mm). For insertion into the brass insert according to LKA guidelines
- **Thermal:** variant with thermal insulation

NOTE

Drive-over access covers are only suitable for installation in restricted traffic areas at reduced speeds.

LOAD



Watch installation video