

ROUND FLOOR ACCESS COVER IN STAINLESS STEEL

SA2 - weatherproof with power-assisted opening



MANHOLE COVER

Solid cover made from 2 mm thick stainless steel, with assisted opening and internal locking device to prevent closing accidental. Equipped with hydraulic pistons that facilitate its opening and from sturdy hidden hinges. Opening the lid up to 100° and self-tightening closure with oval brass cap.


GASKET

Equipped with a replaceable and resistant perimeter gasket atmospheric agents.

FRAMES

Type ES1: made with a stainless steel profile equipped with pre-drilled fins, including dowels for direct installation on concrete

Type ES 3: alternatively with zanches to be fixed during the appropriate throwing of the support base

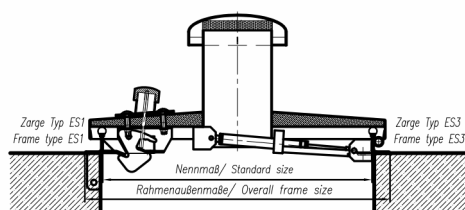

	ITEM	Material	Nominal size	Light hole [ca. mm]	Overall frame size [ca. mm]	M - S
Type RA	SA2-600RA	1.4301/1.4571	620	620	700	S
	SA2-800RA	1.4301/1.4571	800	800	880	S
	SA2-1000RA	1.4301/1.4571	1000	1000	1080	S
	SA2-1200RA	1.4301/1.4571	1200	1200	1280	S
Type RB	SA2-600RB	1.4301/1.4571	620	620	700	S
	SA2-800RB	1.4301/1.4571	800	800	880	S
	SA2-1000RB	1.4301/1.4571	1000	1000	1080	S
	SA2-1200RB	1.4301/1.4571	1200	1200	1280	S
Type RC	SA2-600RC	1.4301/1.4571	620	620	700	S
	SA2-800RC	1.4301/1.4571	800	800	880	S
	SA2-1000RC	1.4301/1.4571	1000	1000	1080	S
	SA2-1200RC	1.4301/1.4571	1200	1200	1280	S
Type RD	SA2-600RD	1.4301/1.4571	620	620	700	S
	SA2-800RD	1.4301/1.4571	800	800	880	S
	SA2-1000RD	1.4301/1.4571	1000	1000	1080	S
	SA2-1200RD	1.4301/1.4571	1200	1200	1280	S

Special size on enquiry!

M Available in stock while supplies last

S Customized production

APPLICATION FIELDS

Ducts of all types, for example:

- Fountain and spring wells
- Water interception wells
- Wells for settling tanks
- Rainwater recovery wells

EXECUTION MODELS

- **Type A:** without insulation
- **Type B:** with insulation
- **Type C:** with air vent, without insulation
- **Type D:** with air vent, with insulation

