


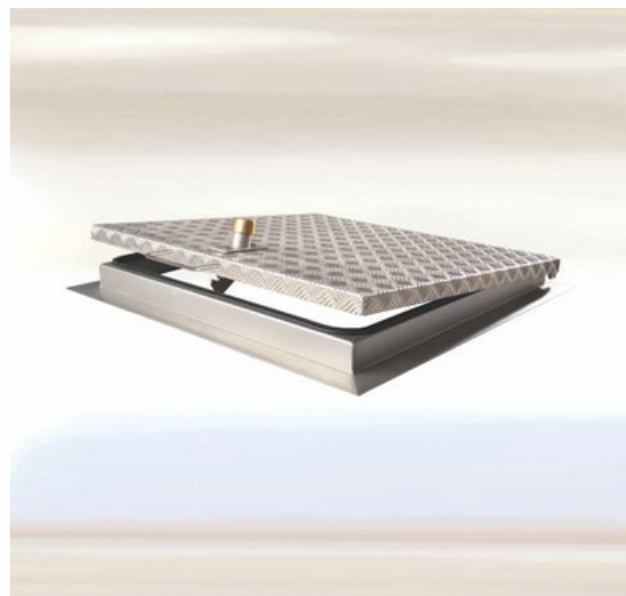


FLOOR ACCESS COVER

IN ALUMINIUM OR STAINLESS STEEL


System SA3-RI/SA3-TR- with tread plate, power-assisted opening, shatterproof

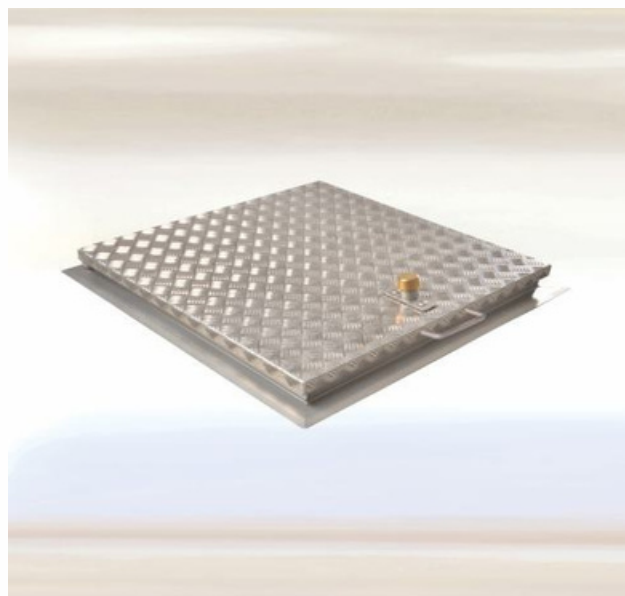

FRAMES

Type ES1: made with a stainless steel profile equipped with pre-drilled fins, including dowels for direct installation on concrete

Type ES 3: alternatively with zanches to be fixed during the appropriate throwing of the support base

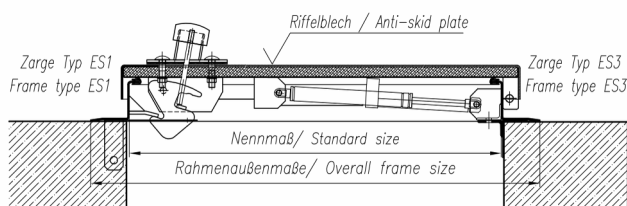

MANHOLE COVER

Solid cover made from 4 mm thick tread sheet metal in aluminium/stainless steel, with assisted opening and internal locking device to prevent closing accidental. Equipped with hydraulic pistons that facilitate its opening and from sturdy hidden hinges. Opening the lid up to 100° and self-tightening closure with oval brass cap.

Now available in oversize!

GASKET

Equipped with a replaceable and resistant perimeter gasket atmospheric agents.

APPLICATION FIELDS

Ducts of all types, for example:

- Fountain and spring wells
- Water interception wells
- Wells for settling tanks
- Rainwater recovery wells

EXECUTION MODELS

- **Type RI** in aluminum tread plate
- **Type TR** in stainless steel tread plate

ITEM		Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M S
Type RI	Aluminium				
	SA3-RI-600600AL	600	570x570	726x726	S
	SA3-RI-800800AL	800	770x770	926x926	S
	SA3-RI-10001000AL	1000	970x970	1126x1126	S
	SA3-RI-12001200AL	1200	1170x1170	1326x1326	S
Type TR	Stainless steel				
	SA3-TR-600600E	600	570x570	726x726	S
	SA3-TR-800800E	800	770x770	926x926	S
	SA3-TR-10001000E	1000	970x970	1126x1126	S
	SA3-TR-12001200E	1200	1170x1170	1326x1326	S

Special size on enquiry!

M Available in stock while supplies last

S Customized production