

SQAURE FLOOR ACCESS COVER IN STAINLESS STEEL

SA5 - flood resistant with column up to 1 mt of water




FRAMES

Type ES1: made with a stainless steel profile equipped with pre-drilled fins, including dowels for direct installation on concrete

NOTE

Flood resistant up to 1 mt of water

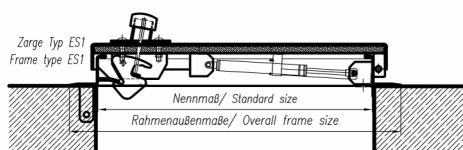

MANHOLE COVER

Solid cover made from 4 mm thick stainless steel, with assisted opening and internal locking device to prevent closing accidental, surface lacquered with glass beads.

Equipped with hydraulic pistons that facilitate its opening and from sturdy hidden hinges. Opening the lid up to 100° and self-tightening closure with oval brass cap.

GASKET

Equipped with a replaceable and resistant perimeter gasket atmospheric agents.

	ITEM	Material	Nominal size	Light hole [ca. mm]	Overall frame size [ca. mm]	M - S
Type E	SA5-600600E	1.4301/1.4571	600	570 x 570	726 x 726	S
	SA5-800800E	1.4301/1.4571	800	770 x 770	926 x 926	S
	SA5-10001000E	1.4301/1.4571	1000	970 x 970	1126 x 1126	S
	SA5-12001200E	1.4301/1.4571	1200	1170 x 1170	1326 x 1326	S
Type F	SA5-600600F	1.4301/1.4571	600	570 x 570	726 x 726	S
	SA5-800800F	1.4301/1.4571	800	770 x 770	926 x 926	S
	SA5-10001000F	1.4301/1.4571	1000	970 x 970	1126 x 1126	S
	SA5-12001200F	1.4301/1.4571	1200	1170 x 1170	1326 x 1326	S

Special size on enquiry!

M Available in stock while supplies last

S Customized production

APPLICATION FIELDS

Ducts of all types, for example:

- Fountain and spring wells
- Water interception wells
- Wells for settling tanks
- Rainwater recovery wells

EXECUTION MODELS

- **Type E:** without insulation
- **Type F:** with insulation

SA3



Watch
installation
video