

ROUND FLOOR ACCESS COVER IN STAINLESS STEEL



SA6 - flood resistant with column up to 1 mt of water



MANHOLE COVER

Solid cover made from 4 mm thick stainless steel, with assisted opening and internal locking device to prevent closing accidental, surface lacquered with glass beads.

Equipped with hydraulic pistons that facilitate its opening and from sturdy hidden hinges. Opening the lid up to 100° and self-tightening closure with oval brass cap.

GASKET


Equipped with a replaceable and resistant perimeter gasket atmospheric agents.

FRAMES

Type ES1: made with a stainless steel profile equipped with pre-drilled fins, including dowels for direct installation on concrete

NOTE

Flood resistant up to 1 mt of water

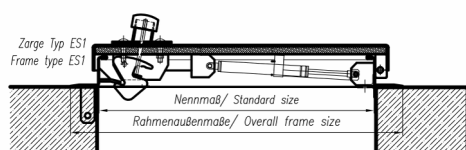

	ITEM	Material	Nominal size	Light hole [ca. mm]	Overall frame size [ca. mm]	M - S
Type RA	SA6-600RA	1.4301/1.4571	620	620	700	S
	SA6-800RA	1.4301/1.4571	800	800	880	S
	SA6-1000RA	1.4301/1.4571	1000	1000	1080	S
	SA6-1200RA	1.4301/1.4571	1200	1200	1280	S
Type RB	SA6-600RB	1.4301/1.4571	620	620	700	S
	SA6-800RB	1.4301/1.4571	800	800	880	S
	SA6-1000RB	1.4301/1.4571	1000	1000	1080	S
	SA6-1200RB	1.4301/1.4571	1200	1200	1280	S

Special size on enquiry!

M Available in stock while supplies last

S Customized production

APPLICATION FIELDS

Ducts of all types, for example:

- Fountain and spring wells
- Water interception wells
- Wells for settling tanks
- Rainwater recovery wells

EXECUTION MODELS

- **Type RA:** without insulation
- **Type RB:** with insulation

