


FLOOR ACCESS COVER IN ALUMINIUM

Series Visedge - filling, removable




The Floor Access Cover Series Visedge is made with an aluminum frame. The installation height is only 50 mm. The recommended filling thickness is max 3 mm. The floor access cover is equipped with three special gaskets along the entire perimeter.

The frame is fixed by throwing at floor level. The lid is fixed to the frame by 4 tightening screws, and can be removed with special lifting keys. The tub can be filled with vinyl, Linoleum, moquet and other elastic materials.

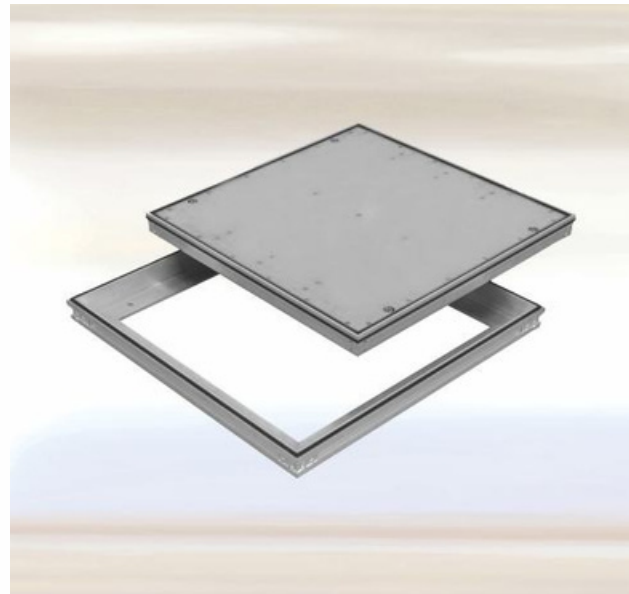

APPLICATION

For indoor floor ducts.

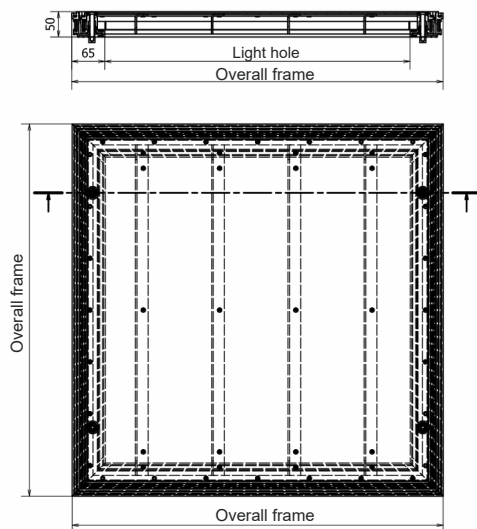

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
PRE-300300ALVis	430 x 430	300 x 300	9 kg	S
PRE-400400ALVis	530 x 530	400 x 400	12 kg	S
PRE-500500ALVis	630 x 630	500 x 500	16 kg	S
PRE-600600ALVis	730 x 730	600 x 600	22 kg	S
PRE-700700ALVis	830 x 830	700 x 700	29 kg	S
PRE-800800ALVis	930 x 930	800 x 800	35 kg	S
PRE-900900ALVis	1030 x 1030	900 x 900	42 kg	S
PRE-10001000ALVis	1130 x 1130	1000 x 1000	47 kg	S

 Available in stock while supplies last

 Customized production

MATERIAL

Frame in aluminium.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

OWN PRODUCTION

Floor Access Cover Series Visedge is our own production in-house.

LOAD



PARTICULAR ADVANTAGES

- With 3 special gaskets
- Almost invisible in the installed state
- Can be easily opened due to the conic construction method
- Production in short time
- Own production



 **EASYLIFTER**

We recommend to use the EasyLifter. More informations: page 62