

FLOOR ACCES COVER IN ALUMINIUM

Series Visedge multidoor - filling, removable




The Floor Access Cover Series Visedge is made with an aluminum frame. The installation height is only 50 mm. The recommended filling thickness is max 3 mm. The floor access cover is equipped with three special gaskets along the entire perimeter.

The frame is fixed by throwing at floor level. The lid is fixed to the frame by 4 tightening screws, and can be removed with special lifting keys.

The tub can be filled with vinyl, Linoleum, moquet and other elastic materials.

APPLICATION

For indoor floor ducts.

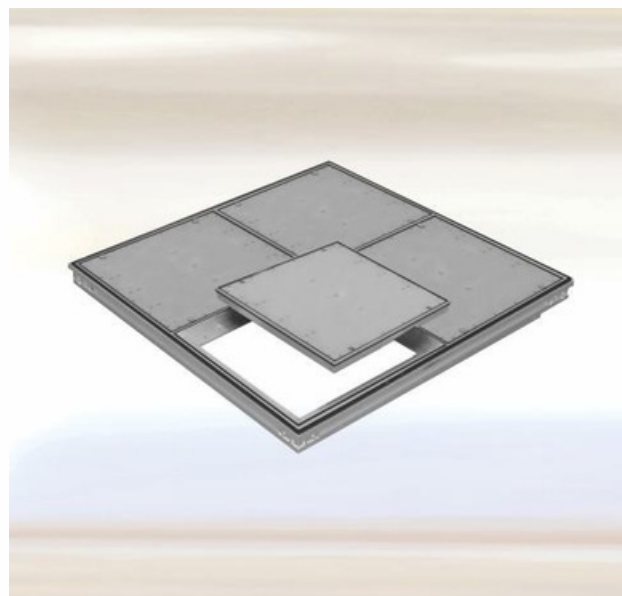

MATERIAL


Frame in aluminium.

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

OWN PRODUCTION

Floor Access Cover Series Visedge is our own production in-house.

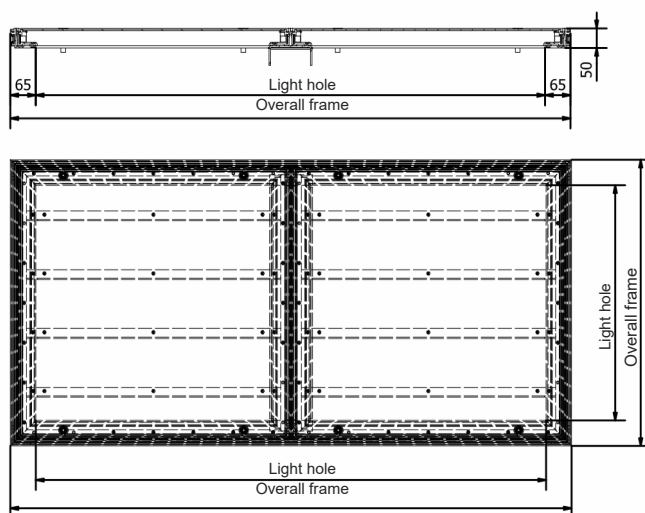

PARTICULAR ADVANTAGES

- With 3 special gaskets
- Almost invisible in the installed state
- Can be easily opened due to the conic construction method
- Production in short time
- Own production

LOAD



EASYLIFTER

We recommend to use the EasyLifter. More informations: page 62