

FLOOR ACCESS COVER IN STAINLESS STEEL

Series 2500 - filling, removable



The Series 2500 floor manhole cover is made of 2.5 mm stainless steel. The depth of the tub is 20 mm and the installation height is only 25 mm. The frame is fixed by throwing at floor level.


The tub can then be filled and inserted into the frame. The lid is fixed to the frame by 4 tightening screws, and can be removed with special lifting keys. The filling of the tub is possible with wood, parquet, hard floors or other materials.

APPLICATION

For indoor floor ducts.

MATERIAL

Frame and tray made of 2 mm stainless steel.

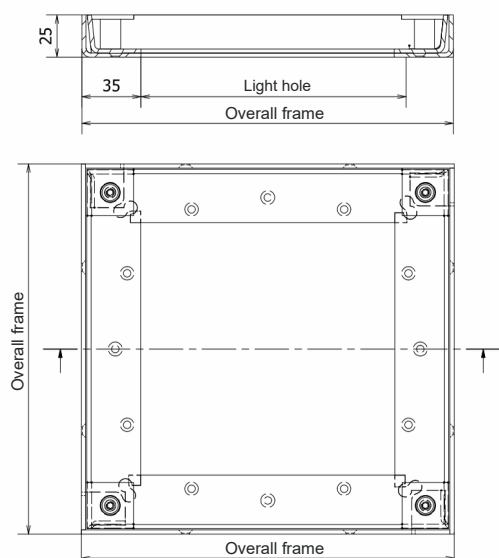

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
PRE-300300E25	370 x 370	300 x 300	3,0 kg	S
PRE-400400E25	470 x 470	400 x 400	3,8 kg	S
PRE-500500E25	570 x 570	500 x 500	4,6 kg	S
PRE-600600E25	670 x 670	600 x 600	5,5 kg	S
PRE-700700E25	770 x 770	700 x 700	6,3 kg	S
PRE-800800E25	870 x 870	800 x 800	7,2 kg	S
PRE-900900E25	970 x 970	900 x 900	8,1 kg	S

M Available in stock while supplies last

S Customized production

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS

Customized production upon customer enquiry.

OWN PRODUCTION

Floor Access Cover Series 2500 is our own production in-house.

PARTICULAR ADVANTAGES

- Almost invisible in the installed state
- The tray height is 20 mm
- Can be easily opened due to the conic construction method
- Production in short time

LOAD

