


FLOOR ACCESS COVER IN GALVANIZED STEEL

System ECO - fillable, removable

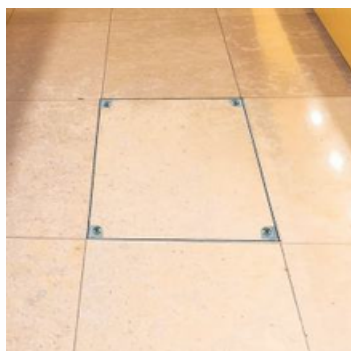

The floor access cover system ECO is made of 2 mm galvanized steel.

Our product range of different tray depths of 50 mm and 120 mm offers a suitable solution for every application.



The frame is set in concrete on grade. Subsequently, the tray can be filled and inserted into the frame. The cover can be lifted out on the corner points with the lifting key. The tray can be filled with paving, tiles, concrete, artificial resin, granite, terrazzo tiles, wood and hard floor covering or other materials.

APPLICATION

For indoor and outdoor floor ducts.

MATERIAL

Frame and tray made of 2 mm galvanized steel.

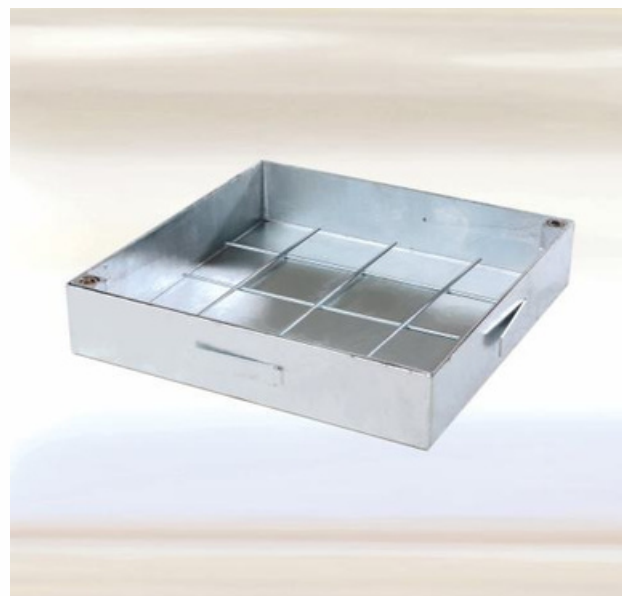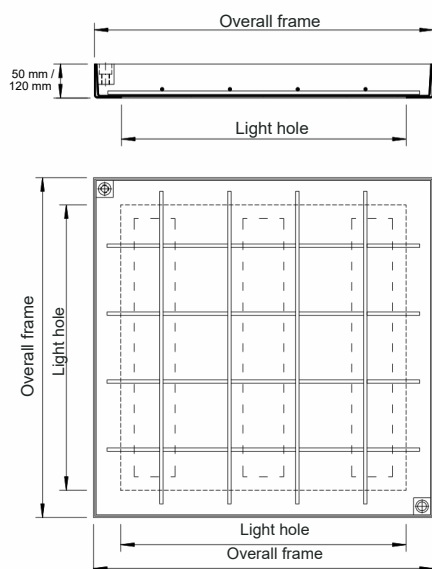

ITEM	Overall frame size [ca. mm]	Light hole [ca. mm]	Empty weight [ca. kg]	M - S
ECO-400400V50	400 x 400	320 x 320	6 kg	M
ECO-500500V50	500 x 500	420 x 420	9 kg	M
ECO-600600V50	600 x 600	520 x 520	11 kg	M
ECO-700700V50	700 x 700	620 x 620	14 kg	M
ECO-800800V50	800 x 800	720 x 720	17 kg	M
ECO-900900V50	900 x 900	820 x 820	24 kg	M
ECO-10001000V50	1000 x 1000	920 x 920	30 kg	M
ECO-400400V120	400 x 400	320 x 320	10 kg	M
ECO-500500V120	500 x 500	420 x 420	13 kg	M
ECO-600600V120	600 x 600	520 x 520	19 kg	M
ECO-700700V120	700 x 700	620 x 620	21 kg	M
ECO-800800V120	800 x 800	720 x 720	24 kg	M
ECO-900900V120	900 x 900	820 x 820	29 kg	M
ECO-10001000V120	1000 x 1000	920 x 920	33 kg	M

M Available in stock while supplies last

S Customized production

INSTALLATION AND OPENING

The installation shall be implemented in a professional manner in accordance with our installation instructions. A lifting key and installation instructions are included with every FF floor access cover.

CUSTOMIZED SOLUTIONS


Customized production upon customer enquiry.

LOAD



PARTICULAR ADVANTAGES

- With fixing anchors for safe support
- Almost invisible in the installed state
- Tray depths of 50 mm and 120 mm available
- Can be easily opened due to the conic construction method
- To be laid at floor level
- Customized production



We recommend to use the EasyLifter. More informations: page 62